

DSP First, 2/e




MODIFIED TLH

Sampling & Aliasing

Sampling Sinusoidal Signals (1 of 2)

Figure 4-2: Plotting format for discrete-time signals, called a stem plot. In MATLAB, the function stem produces this plot. Some students also refer to the stem plot as a “lollypop” plot.

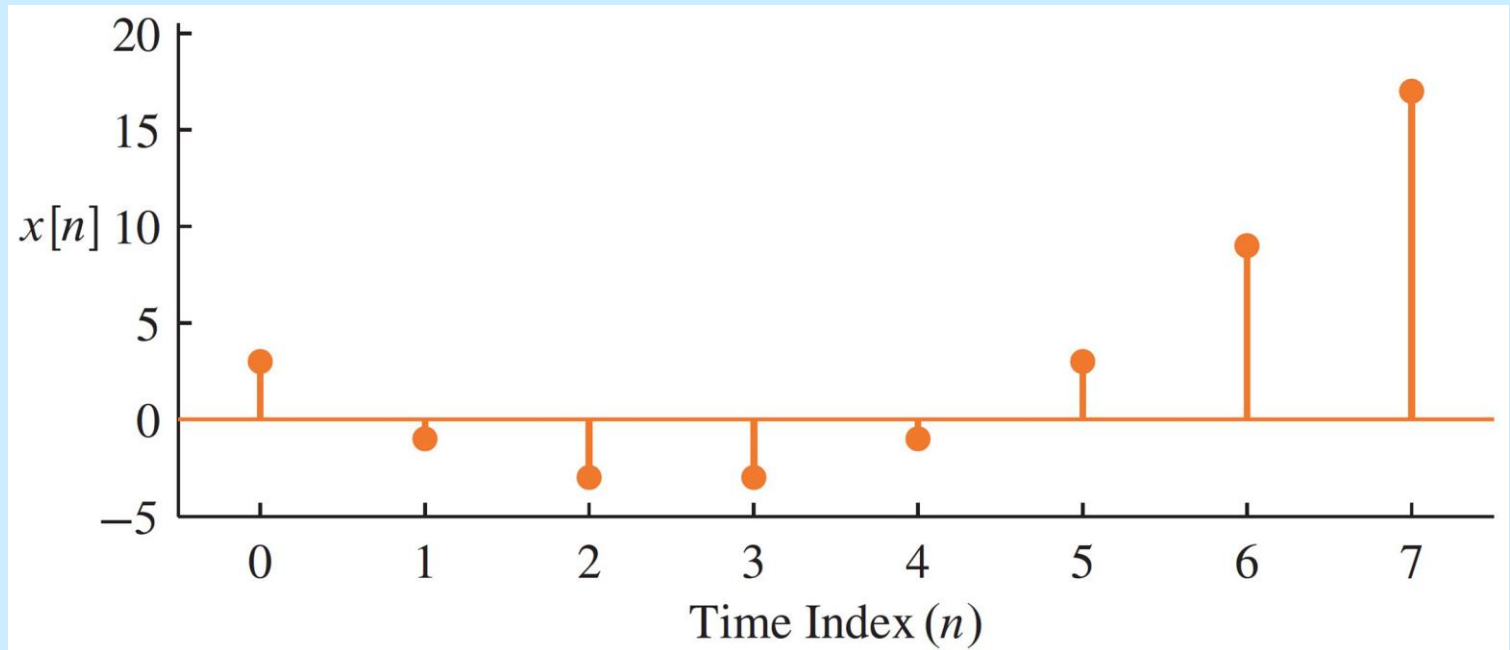

```
>> help stem
```


```
stem Discrete sequence or "stem" plot.
```

`stem(Y)` plots the data sequence `Y` as stems from the `x` axis terminated with circles for the data value. If `Y` is a matrix then each column is plotted as a separate series.

`stem(X,Y)` plots the data sequence `Y` at the values specified in `X`.

Sampling Sinusoidal Signals (2 of 2)

Figure 4-3: A continuous-time 100 Hz sinusoid (a) and two discrete-time sinusoids formed by sampling at $f_s = 2000$ samples/s (b) and at $f_s = 500$ samples/s (c).

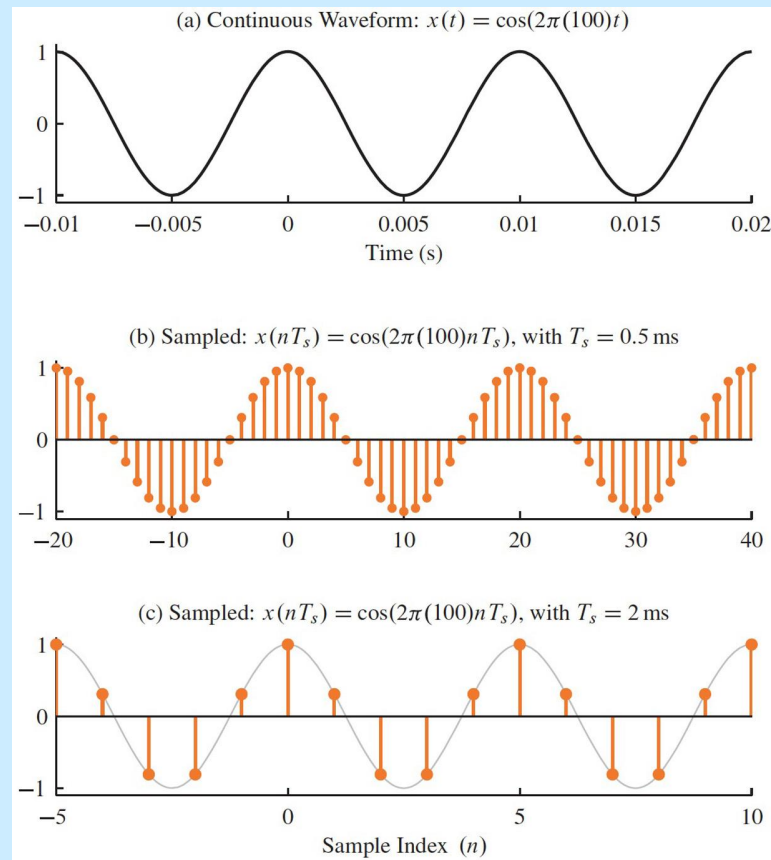

LECTURE OBJECTIVES

- SAMPLING can cause ALIASING
 - Sampling Theorem
 - Sampling Rate > 2(Highest Frequency)
- Spectrum for digital signals, $x[n]$
 - Normalized Frequency

$$\hat{\omega} = \omega T_s = \frac{2\pi f}{f_s} + 2\pi\ell$$

↑
ALIASING

System IMPLEMENTATION

- ANALOG/ELECTRONIC:

- Circuits: resistors, capacitors, op-amps



- DIGITAL/MICROPROCESSOR

- Convert $x(t)$ to **numbers** stored in memory




SAMPLING $x(t)$

- SAMPLING PROCESS
 - Convert $x(t)$ to **numbers** $x[n]$
 - “ n ” is an integer index; $x[n]$ is a sequence of values
 - Think of “ n ” as the storage address in memory
- UNIFORM SAMPLING at $t = nT_s$
 - IDEAL: $x[n] = x(nT_s)$



SAMPLING RATE, f_s

- SAMPLING RATE (f_s)
 - $f_s = 1/T_s$
 - NUMBER of SAMPLES PER SECOND
 - $T_s = 125 \text{ microsec} \rightarrow f_s = 8000 \text{ samples/sec}$
 - UNITS of f_s ARE HERTZ: 8000 Hz
- UNIFORM SAMPLING at $t = nT_s = n/f_s$
 - IDEAL: $x[n] = x(nT_s) = x(n/f_s)$

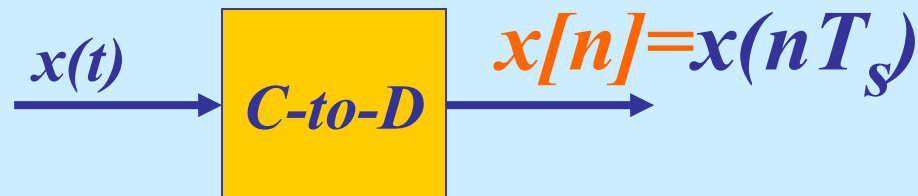


STORING DIGITAL SOUND




- $x[n]$ is a SAMPLED SIGNAL
 - A list of numbers stored in memory
- EXAMPLE: audio CD
- CD rate is 44,100 samples per second
 - 16-bit samples
 - Stereo uses 2 channels
- Number of bytes for 1 minute is
 - $2 \times (16/8) \times 60 \times 44100 = 10.584$ Mbytes


$$f = 100\text{Hz}$$

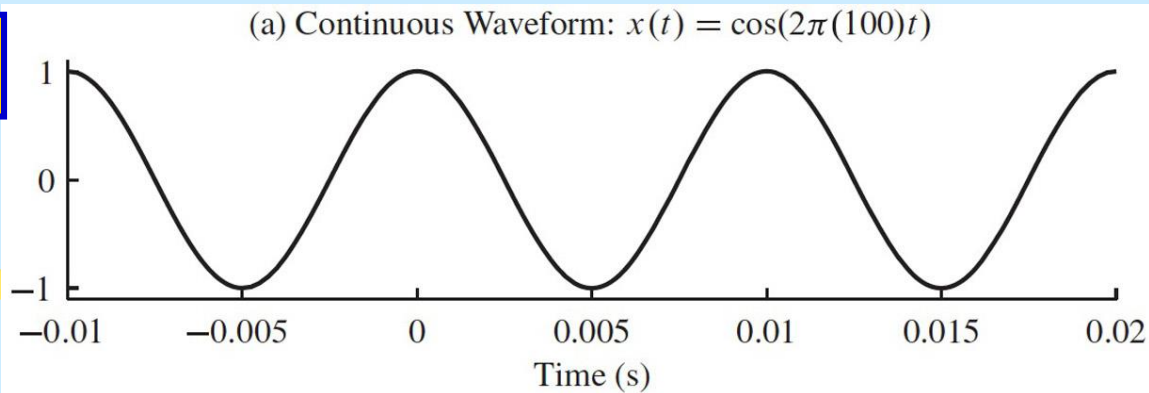

$$f_s = 2\text{ kHz}$$

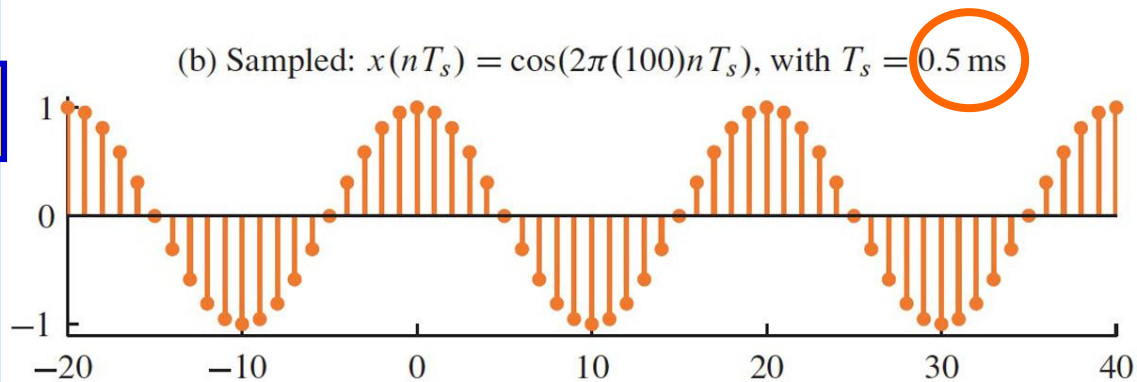

$$f_s = 500\text{Hz}$$

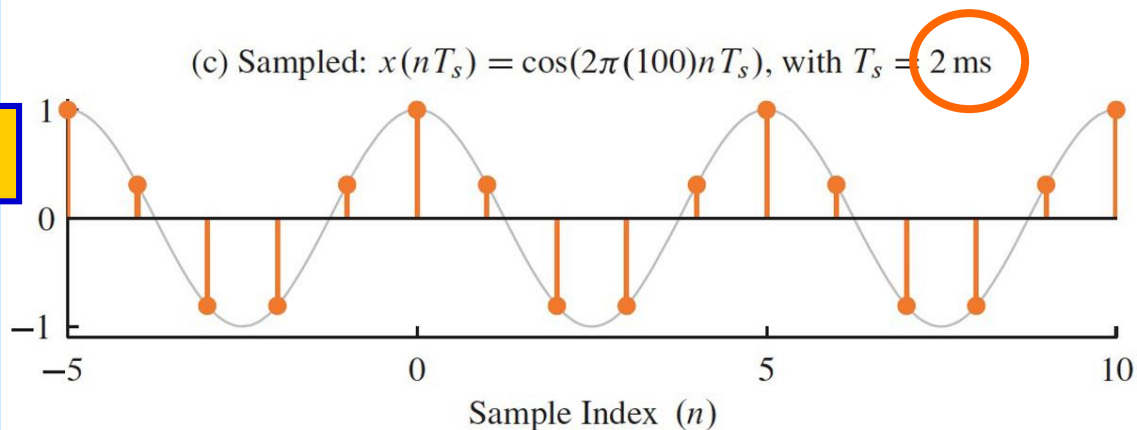

SAMPLING THEOREM

- HOW OFTEN DO WE NEED TO SAMPLE?
 - DEPENDS on FREQUENCY of SINUSOID
 - ANSWERED by SHANNON/NYQUIST Theorem
 - ALSO DEPENDS on “RECONSTRUCTION”

Shannon Sampling Theorem

A continuous-time signal $x(t)$ with frequencies no higher than f_{\max} can be reconstructed exactly from its samples $x[n] = x(nT_s)$, if the samples are taken at a rate $f_s = 1/T_s$ that is greater than $2f_{\max}$.

DISCRETE-TIME SINUSOID

- Change $x(t)$ into $x[n]$ DERIVATION

$$x(t) = A \cos(\omega t + \varphi)$$

$$x[n] = x(nT_s) = A \cos(\omega nT_s + \varphi)$$

$$x[n] = A \cos((\omega T_s)n + \varphi)$$

$$x[n] = A \cos(\hat{\omega}n + \varphi)$$

$$\hat{\omega} = \omega T_s = \frac{\omega}{f_s}$$

DEFINE DIGITAL FREQUENCY

DIGITAL FREQUENCY

$$\hat{\omega}$$

$$\hat{\omega} = \omega T_s = \frac{2\pi f}{f_s}$$

$-\pi$ to π


If 2 sided

- $\hat{\omega}$ VARIES from 0 to 2π , as f varies from 0 to the sampling frequency
- UNITS are radians, not rad/sec
 - DIGITAL FREQUENCY is NORMALIZED

SPECTRUM (DIGITAL)


$$\hat{\omega} = 2\pi \frac{f}{f_s}$$

$$f_s = 1 \text{ kHz}$$

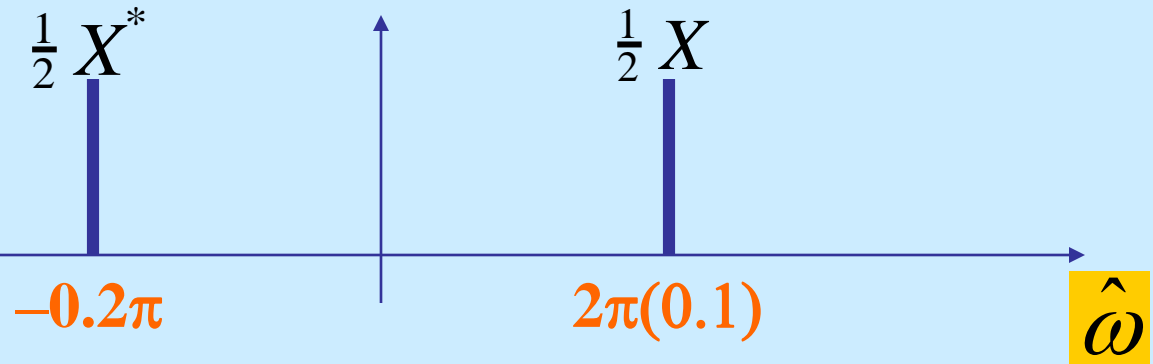


$$x[n] = A \cos(2\pi(100)(n/1000) + \varphi)$$

100-Hz Cosine Wave: Sampled with $T_s = 1 \text{ msec}$ (1000 Hz)

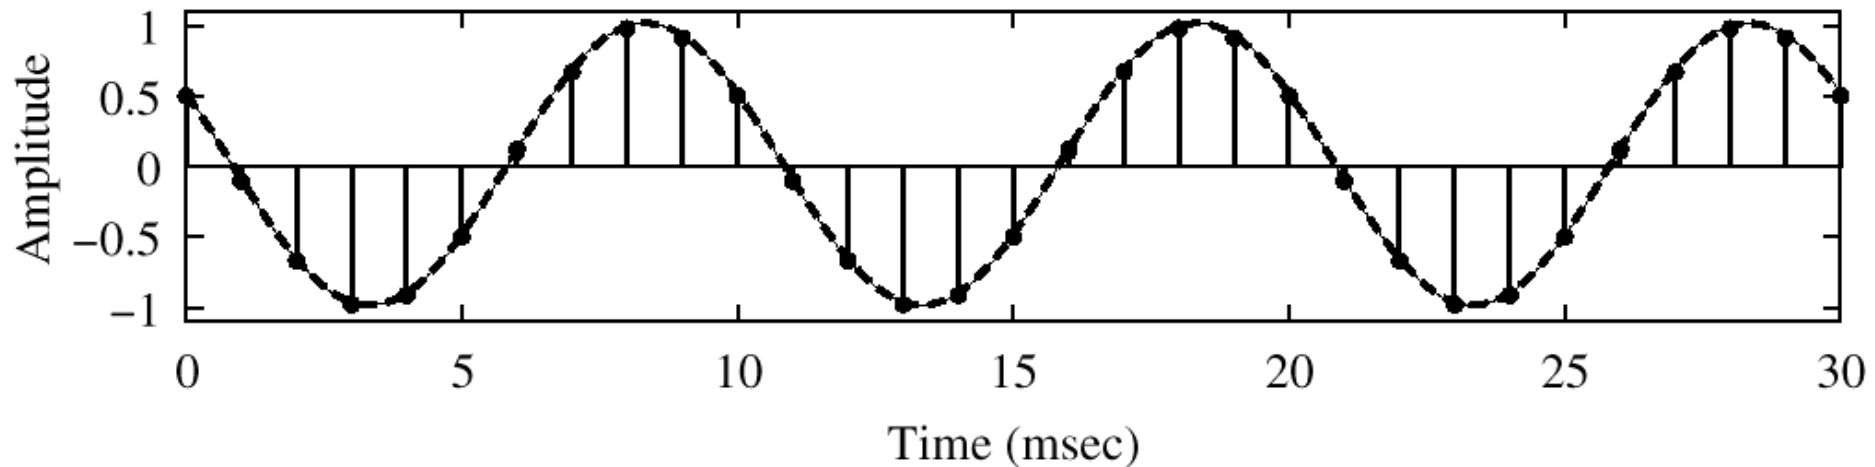


(a) Spectrum of the 100 Hz Cosine Wave

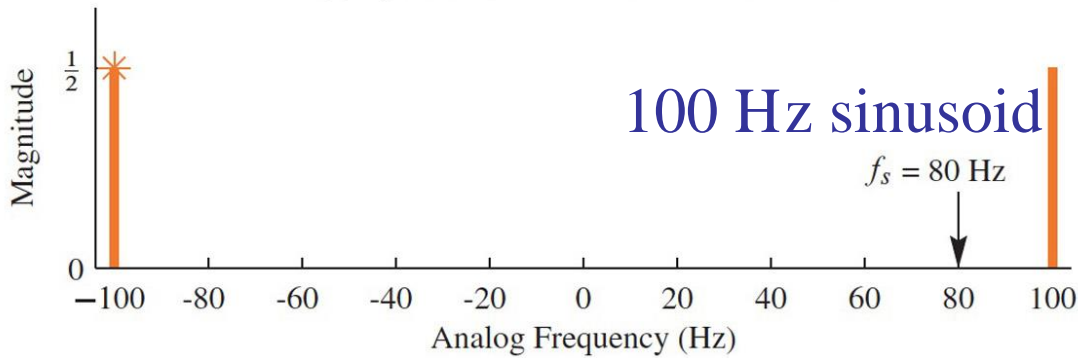

$$f_s = 80 \text{ samples/s.}$$


(b) Sampled at $T_s = 12.5 \text{ ms}$ ($f_s = 80 \text{ Hz}$)

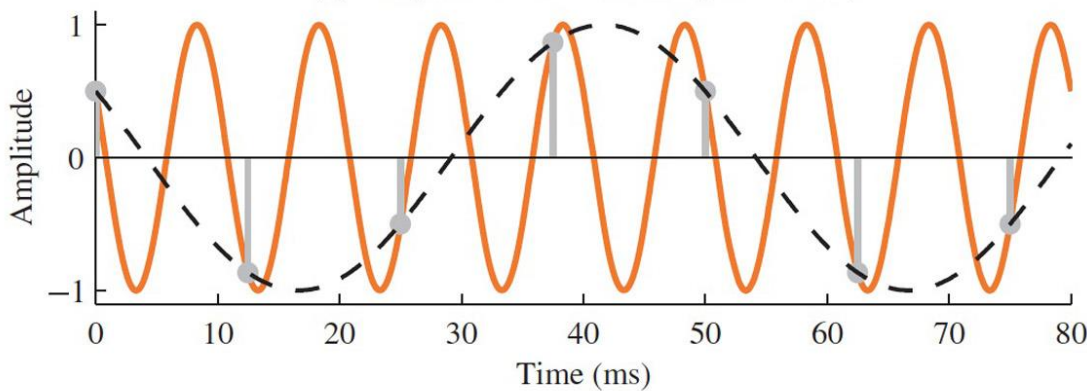

$$\hat{\omega} = \pm 2 \cdot 5\pi \text{ rad,}$$

Subtract $2\pi = 0.5\pi$

(c) Discrete-Time Spectrum of 100 Hz Sinusoid

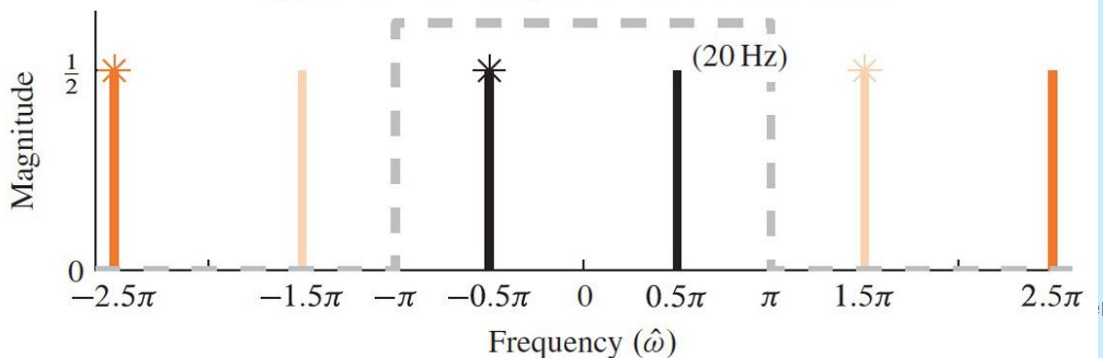

$$F_a = 100 - 80 = 20 \text{ Hz}$$

The REST of the STORY

- Spectrum of $x[n]$ has more than one line for each complex exponential
 - Called ALIASING
 - MANY SPECTRAL LINES
- SPECTRUM is PERIODIC with period = 2π
 - Because

$$A \cos(\hat{\omega}n + \varphi) = A \cos((\hat{\omega} + 2\pi\ell)n + \varphi)$$

ALIASING DERIVATION

- Other Frequencies give the same $\hat{\omega}$

$$x_1(t) = \cos(400\pi t) \quad \text{sampled at } f_s = 1000 \text{ Hz}$$

$$x_1[n] = \cos(400\pi \frac{n}{1000}) = \cos(0.4\pi n)$$

$$x_2(t) = \cos(2400\pi t) \quad \text{sampled at } f_s = 1000 \text{ Hz}$$

$$x_2[n] = \cos(2400\pi \frac{n}{1000}) = \cos(2.4\pi n)$$

$$x_2[n] = \cos(2.4\pi n) = \cos(0.4\pi n + 2\pi n) = \cos(0.4\pi n)$$

$$\Rightarrow x_2[n] = x_1[n]$$

$$2400\pi - 400\pi = 2\pi(1000)$$

ALIASING DERIVATION

- Other Frequencies give the same $\hat{\omega}$

If $x(t) = A \cos(2\pi(\underline{f + \ell f_s})t + \varphi)$

$$t \leftarrow \frac{n}{f_s}$$

and we want : $x[n] = A \cos(\hat{\omega}n + \varphi)$

$$\text{then : } \hat{\omega} = \frac{2\pi(f + \ell f_s)}{f_s} = \frac{2\pi f}{f_s} + \frac{2\pi \ell f_s}{f_s}$$

$$\hat{\omega} = \omega T_s = \frac{2\pi f}{f_s} + 2\pi \ell$$